AUSSIE PLUNGE POOLS™ by DURAPLAS INDUSTRIES PTY LTD

Aussie Plunge Pool Skimmer (KOKIDO 001LX) Self-Compliance Certificate

27/10/25

All Aussie Plunge Pools are supplied with a KOKIDO 001LX Skimmer Box assembly.

The top access hole is 166mm diameter and the lid is anti-slip and has a 22mm vent hole. The lid is 'child-resistant' designed and is held in place by a 'push and turn' locking design as well as the lid has an additional stainless steel locking screw.

If a KOKIDO 001LX Skimmer box is installed on an Aussie Plunge Pool correctly, it will comply with all the requirements of AS1926.3-2010 (5.1-5.3) as listed in this certificate.

John Fleming

Managing Director | Duraplas Industries

9 Robb St, Alstonville NSW 2477 | www.duraplas.com.au | 1300 387 275

Info@duraplas.com.au | PH: (02) 6628 0002| FAX: (02) 6628 3804

Ensure that the locating screw is replaced every time the leave basket is removed for cleaning

Pool & Spa Skimmer Box Standards AS1926.3-2010

5 SKIMMER BOXES

5.1 General

Skimmer boxes and skimming devices shall be manufactured and installed in pools in such a manner as to comply with the following requirements.

5.2 Skimmer box with dimension of top access hole >150 mm

A skimmer box incorporating a basket access hole that is greater than 150 mm diameter if circular or has a plan dimension greater than 150 mm if not circular (see Figure 1) shall comply with the following:

(a) The basket access hole shall not have a plan dimension greater than 280 mm at its widest point.

(b) The basket access hole shall be separated from the edge of the pool by a solid, permanent member that is not less than 100 mm wide at any point.

(c) When a pump is connected to a single skimmer box, then the skimmer box and/or its installation shall incorporate at least two of the following:

(i) The dimensional requirements of Figure 1.

(ii) A child resistant lid.

(iii) Be installed with an auxiliary outlet complying with Clause 6.1.2(b).

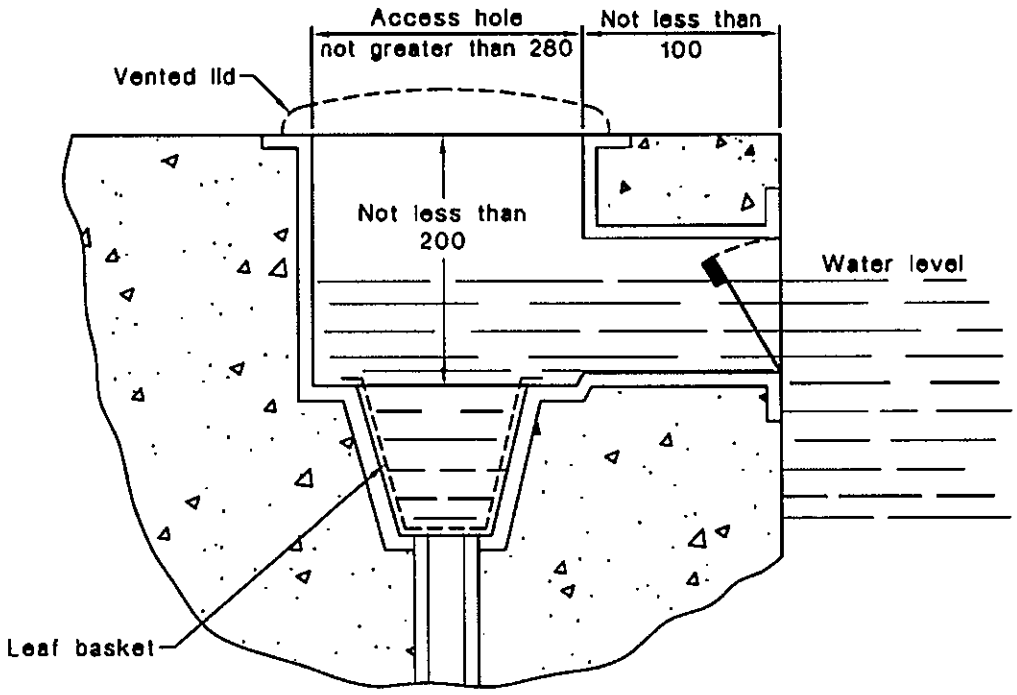

DIMENSIONS IN MILLIMETRES

FIGURE 1 DIMENSIONS OF SKIMMER BOX WITH TOP ACCESS HOLE >150 mm

5.3 Skimmer box with dimension of access hole ≤150 mm

A skimmer box incorporating a basket access hole not greater than 150 mm in diameter or with no horizontal dimensions greater than 150 mm shall have a solid permanent member at least 100 mm wide separating the access hole from the pool edge.

5.4 Skimmer boxes on above ground pools

Where a skimmer box is attached to the outside of the wall of a pre-fabricated pool, the wall of the pool shall extend a minimum of 75 mm above the top of any basket access hole as shown in Figure 2.

Skimmer boxes on above ground pools shall incorporate at least two of the following:

(a) The dimensional requirements of Figure 2.

(b) A child resistant lid.

(c) Be installed with an auxiliary outlet complying with Clause 6.1.2(b).

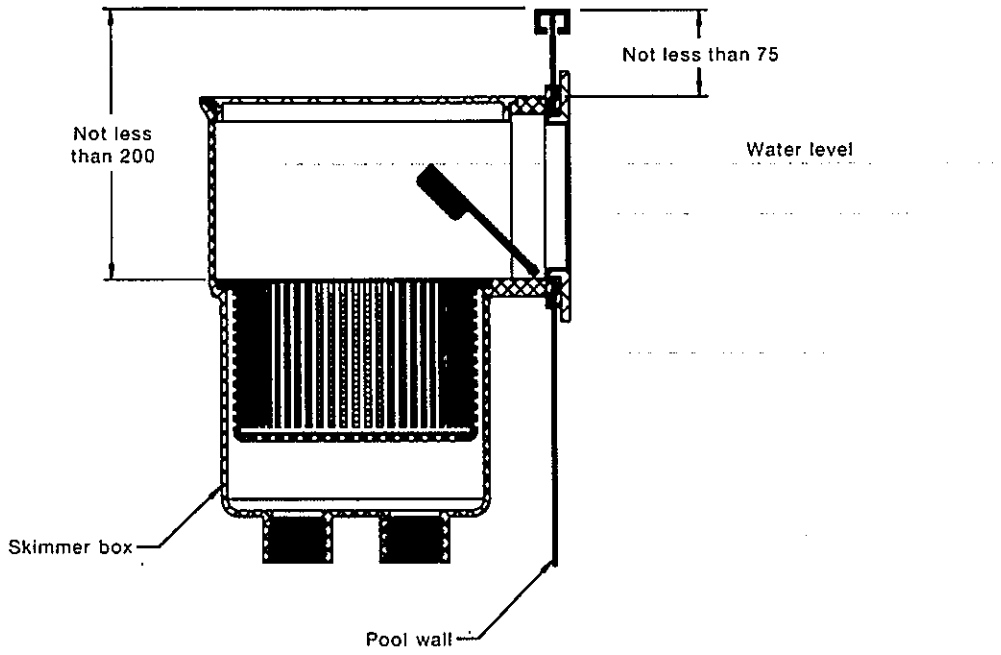

DIMENSIONS IN MILLIMETRES

FIGURE 2 ALLOWABLE DIMENSIONS FOR A SKIMMER BOX ON THE WALL OF A PRE-FABRICATED POOL

5.5 Venting of skimmer boxes

The following requirements apply:

(a) The lids of all skimmer boxes shall be vented to atmosphere.

(b) Skimmer boxes without a basket access hole and/or lid in the top shall be vented to atmosphere in accordance with Figure 3.

(c) The opening of a skimmer box to the pool water shall not be a substitute for a vent to atmosphere.

(d) All vents shall be a nominal 20 mm or greater in width and length, or in diameter.